



EDGE

An elegant luminaire designed to create a flawless 3x180° lighting effect. Ideal for narrow window openings and structures where light loss must be avoided as much as possible.

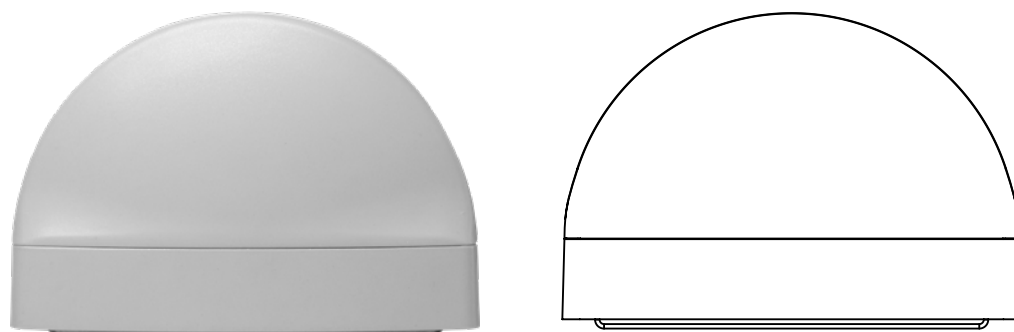

Application



lighting effects

EDGE



3x180°

CRI

≥80 (for white color)

Color Binning

2 MacAdam ellipses for white,
±3 nm for color LED

Voltage


24 V DC

IP65



Lifespan

not less than 50 000 hours


- 40°C + 55°C

Controls, protocols

DMX-512, DMX-512 + RDM

Controls, pixel size

1 luminaire – 1 pixel

Materials

housing – cast aluminum covered with powder paint
plate – stainless steel

Standard RAL colors



Standard coating type

moire


Accessories

diaphragm DFV2.3


Customization

connectors IP68
cable length up to 5m
through-wiring
light color, wattage and luminous flux customized
for a specific project

Available custom versions



Technologies

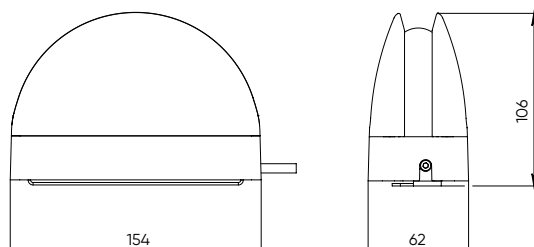

weight, kg
0,8

EDGE

monochrome

1. Select a model

| Serial code | Color | W, max | lm, max |
|-------------|---------------------|----------|----------|
| ILF6-2 | white color mono | 7 7,5 | 60 44 |

2. Create an article number

| Serial code | Color | Optics | Controls* | Supply voltage** |
|-------------|---------------------------------------|--------|-----------|------------------|
| ILF6-2 | W30 W40 W50 R G B A | 3x180 | C R | L24 |

*C – protocol DMX-512
R – protocol DMX-512 + RDM
**L24 – supply voltage 24 V DC

multichannel

1. Select a model

| Serial code | Color | W, max | lm, max |
|-------------|-------|--------|---------|
| ILF12-2 | RGBW | 7 | 60 |

2. Create an article number

| Serial code | Color | Optics | Controls* | Supply voltage** |
|-------------|----------------------------|--------|-----------|------------------|
| ILF12-2 | RGBW30 RGBW40 RGBW50 | 3x180 | C R | L24 |

* C – protocol DMX-512
R – protocol DMX-512 + RDM
**L24 – supply voltage 24 V DC