


# GROUND-mini

NEW

A miniature recessed marker luminaire designed for functional and decorative lighting.




## Application



accent

# GROUND-mini

NEW



120°

## CRI

≥80 (for white color)

## Color Binning

2 MacAdam ellipses for white,  
±3 nm for color LED

## Power factor

>0,9

## Voltage


230 V AC

## IP67



## Lifespan

not less than 50 000 hours



## Controls, protocols

not available

## Materials

housing – cast aluminum

frame – stainless steel

diffuser – silicate tempered glass

## Decorative frame

round

square

## Customization

controls: DMX-512, DMX-512 + RDM

connectors IP68

cable length up to 5m

power supply: 12, 24, 48 V DC



light color, wattage and luminous flux customized  
for a specific project

## Available custom versions



## Maximum static load

5 000kg

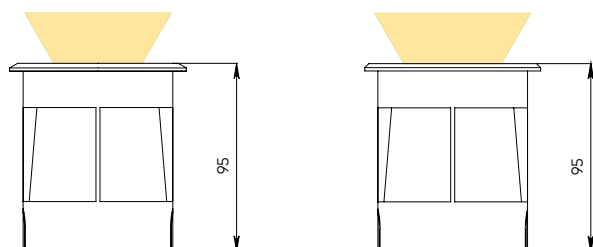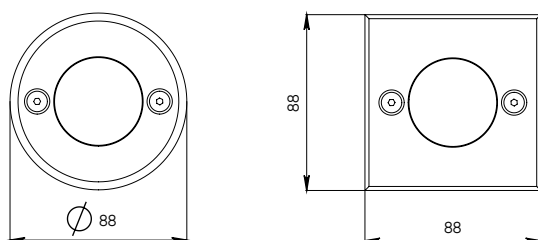

weight, kg

0,5

# GROUND-mini



## 1. Select a model

Serial code	Color	W, max	lm, max
IRG1-1	white	3	40
	color mono	3	20

## 2. Create an article number

Serial code	Color	Optics	Controls	Supply voltage*
IRG1-1	W30 W40 W50 R G B A	120	not available	H

\*H – supply voltage 230 V AC