

KUB fc
INTILED



KUB fc SPECIFIC DESCRIPTION

I N T I L E D

KUB fullcolor delivers over 16 million bright, pure colors in the familiar ultra-compact and sleek KUB body



KUB fc SPECIFIC DESCRIPTION

I N T I L E D

The maximum variety of lighting effects and wide control possibilities in a toy-sized body and onboard power supply makes KUB fc a comfortable and easy choice at any stage of the lighting project: from concept and lighting design to installation and maintenance of the lighting system onsite



KUB fc SPECIFIC DESCRIPTION

I N T I L E D

The compact dimensions make it possible to place KUB fullcolor on columns, visors, in narrow inter-window spaces, on decorative details



KUB fc SPECIFIC DESCRIPTION

The perfect combination of optics and multichip diodes can solve practically any architectural lighting task. No hot spots, edge effects, unwanted light effects with any optics

I N T I L E D



KUB fc SPECIFIC FEATURES

I N T I L E D

The colour mixing occurs inside the body, creating a fundamentally new quality of light, in any shade, including the purest white of any color temperature, be it warm or cold



A unique adjustment system allows you to quickly mount and adjust the luminaire using a regular hexagon screwdriver



KUB fc SPECIFIC FEATURES

I N T I L E D

Advanced feedback control
via DMX-512 + RDM protocol





Accessories


- housing and accessories painting in any RAL color
- IP68 connectors
- cable lengths up to 3 meters
- shield



KUB fc DIMENSIONAL DRAWING

I N T I L E D

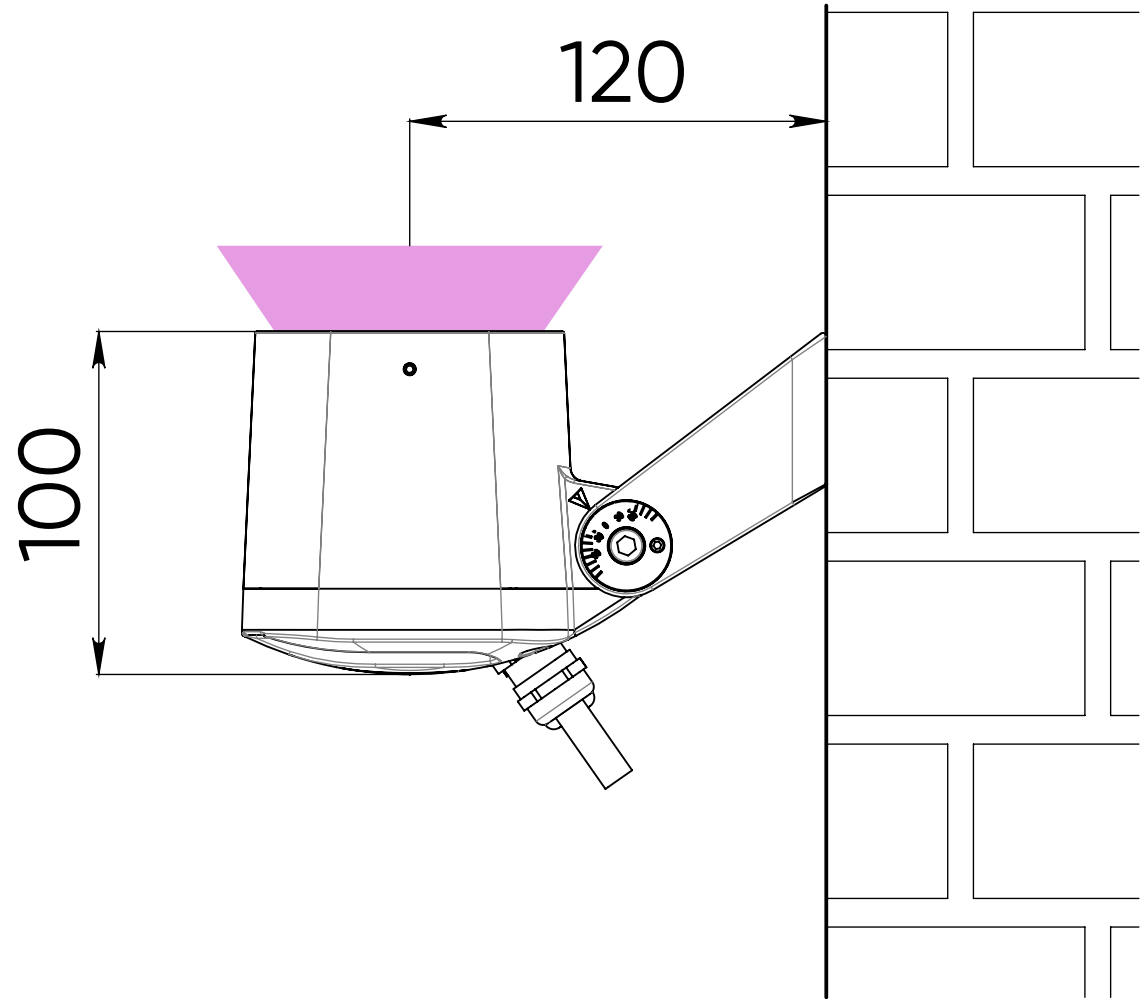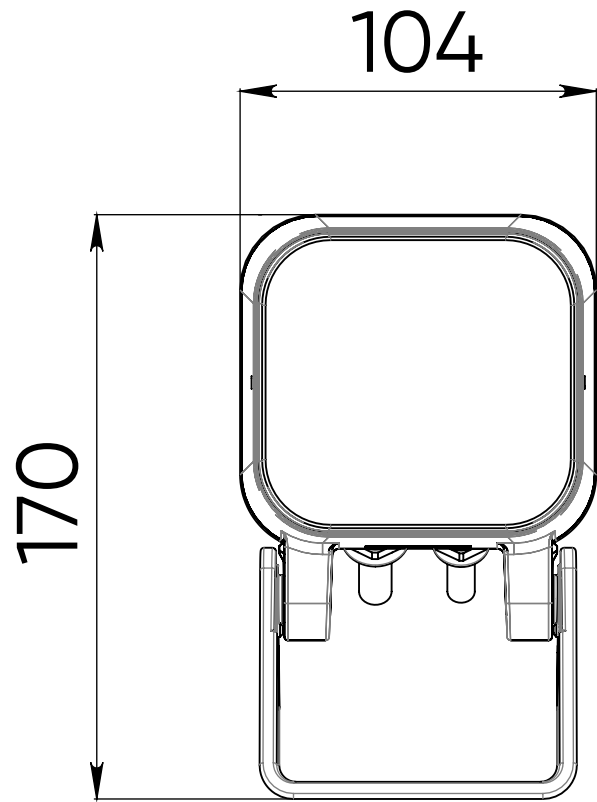

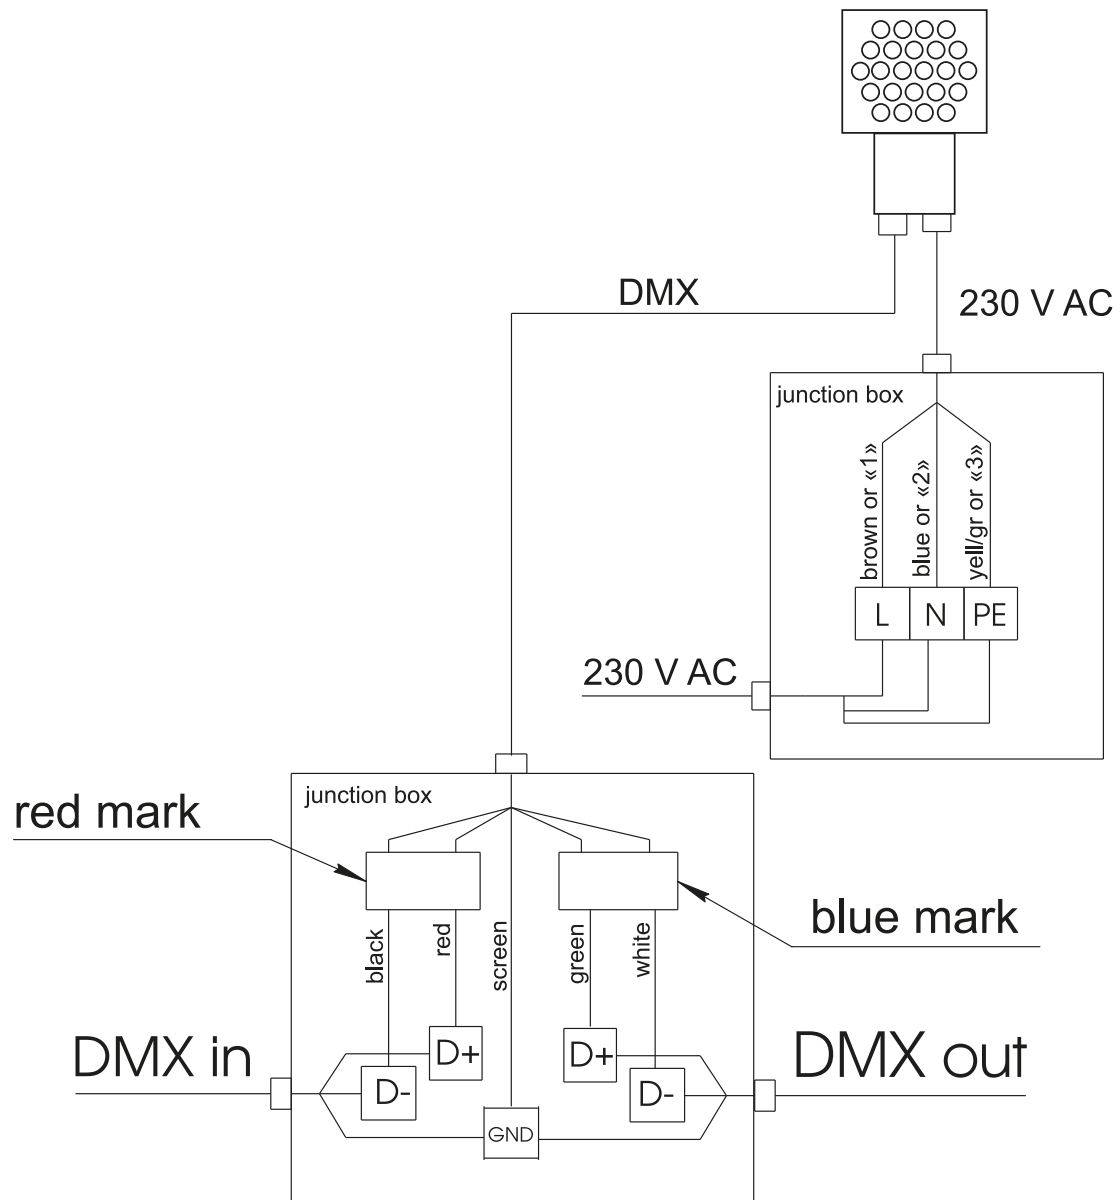

KUB fc MAIN TECHNICAL CHARACTERISTICS


I N T I L E D

Light source	Osram (Germany), Seoul (Korea)
Light color	Fullcolor (R+G+B+W65)
Optics	15°, 30°, 60°, 125°, 15x60°
Luminous flux	500 lm
Wattage	14 W
Voltage	24 V DC, 230 V AC
Protection class	IP66
Operating temperature	-40°C ... +45°C
Lifespan	not less than 50000 hours
Control	DMX-512/DMX-512 + RDM
Dimensions	104x170x116 mm (with bracket)
Weight	1,3 kg
Mounting	on an adjustable bracket
Accessories	shield
Customization	diffuser glass, internal honeycomb louvre, control/power cables of any length up to 3 m, housing and accessories painting in any RAL color, production of customized accessories, IP68 connectors


Compact accent projector

minor tall architectural elements (pilasters, columns)

15°, 30°

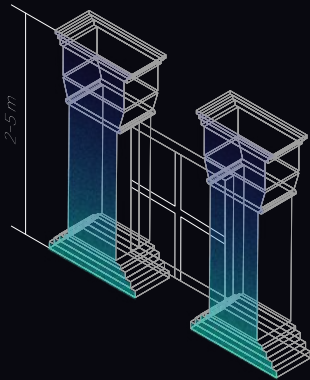


30°, 15x60°




minor small architectural elements (relief, mascarón)

60°, 125°

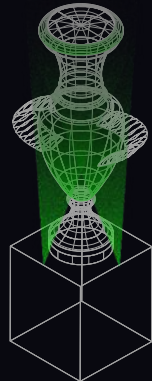


125°

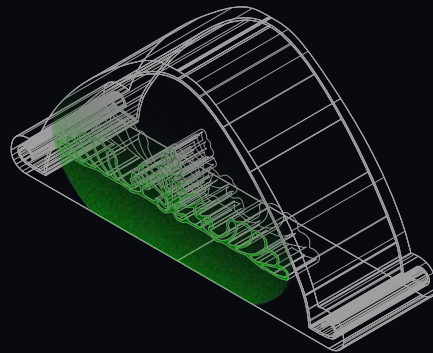


interwindow spaces, 1-2 floors high

15x60°, 15°, 60°




60°, 125°



landscape lighting - flooding from small polls, compact urban elements

30°, 60°, 125°

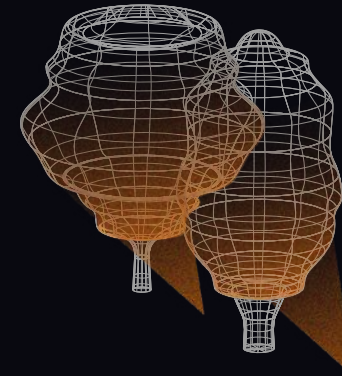

30°, 60°





more information available
on the website