



LACE 3D

A series with a multidimensional curve for soft floodlighting and flawless lines of light on surfaces of all shapes. The sealed IP67 body makes it possible to use the luminaire even in harsh climates.

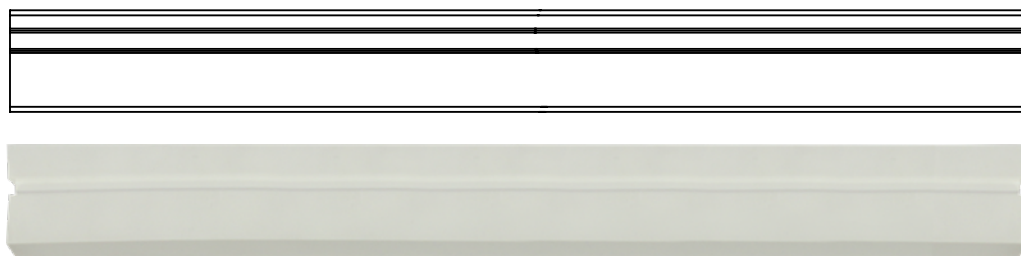

Application



flexible line

LACE 3D



3000K 4000K 5000K



Red Green Blue



120°

CRI

≥80 (for white color)

Color Binning

2 MacAdam ellipses for white,
±3 nm for color LED

Voltage


24 V DC

IP67



Lifespan

not less than 50 000 hours



- 40°C + 55°C

Controls, protocols

PWM

Controls, pixel size



1 luminaire – 1 pixel

Materials

silicon with full UV-protection, salt and other aggressive substances protection (chlorine, chemicals, alkali, etc.), intended for efficient outdoor application

Bending

combined (vertical+horizontal)



weight, kg/m
0,35

*maximum length 10m

LACE 3D

1. Select a model

Serial code	Color	lm/m, max
3DA	white	745
	color mono	533

2. Create an article number

Serial code	Wattage*	Color	Cable outlet**	Protection class
3DA	L S H	W30 W40 W50 R G B	S E B	IP67

* L – wattage 5W/m
S – wattage 10W/m
H – wattage 15W/m
**S – cable outlet on the side
E – cable outlet on the end
B – cable outlet from the bottom