


SLIM NEW


An ultra-compact member of the INTILED family of linear luminaires. As a result of a careful R&D process, we created a luminaire with the most thoughtful design and content, for reliable operation year after year in any climate.




Application



floodlight



accent



contour

SLIM NEW



3000K



4000K



5000K



40x100°



50x90°



60x90°



120°

CRI

≥80 (for white color)

Color binning

2 MacAdam ellipses for white,
±3 nm for color LED

Voltage

48 V DC

IP66



Lifespan

not less than 50 000 hours

- 40°C + 55°C

Controls, protocols

PWM

Controls, pixel size

1 luminaire – 1 pixel

Materials

housing – extruded aluminum
end caps – cast aluminum
diffusor – silicate tempered glass

Standard RAL colors



1015 1001 8004 8017



9005 7016 9006 9003

Standard coating type

moire

Accessories

brackets
screens
shields


Customization

controls: DMX-512
product length, light color, wattage and luminous flux
customized for a specific project


Available custom versions



Length, L

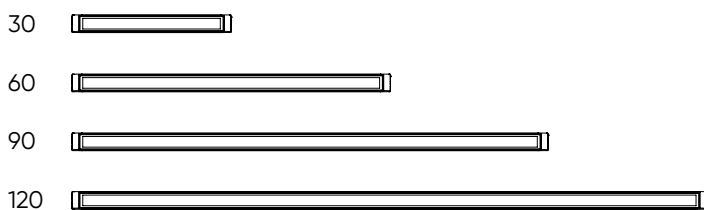

L, cm	weight, kg
30	0,5
60	0,9
90	1,3
120	1,7

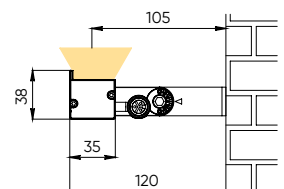

SLIM NEW

1. Select a model

Serial code	W, max	lm, max	Length, cm
ILF12-0,3	3,4	340	30
ILF25-0,3	7	700	60
ILF38-0,3	11	1050	90
ILF51-0,3	14	1400	120

2. Create an article number

Serial code	Color	Optics	Controls*	Supply voltage**	Length, cm
ILF12-0,3	W30 W40 W50	40x100 50a90 60x90 120	D	L48	30
ILF25-0,3					60
ILF38-0,3					90
ILF51-0,3					120

* D – protocol PWM

**L48 – supply voltage 48 V DC

3. Select accessories

Type	Article number	Distance from the façade to the luminaire center, mm
bracket kit	SLIM-01-50	100
	SLIM-01-100	150

Type	Article number	Height, mm	Length, mm
shields	PP SLIM-01-020-30	10	300
	PP SLIM-01-020-60		600
	PP SLIM-01-020-90		900
	PP SLIM-01-020-120		1200

Type	Article number	Height, mm	Length, mm
screen	SLIM-05-030-30	30	300
	SLIM-05-030-60		600
	SLIM-05-030-90		900
	SLIM-05-030-120		1200